




ADA black plastic

Product Features

- Certified to DIN 19580 Load Class A - 3,500 lbs - 70 psi
- Uses 'QuickLok' boltless locking system
- Suitable for use with System 4000 or System 6100 channels
- Manufactured from durable, UV stable polypropylene
- Raised anti-slip surface detail
- Complies with ADA - American Disabilities Act of 1990 Section 4.5.4
- Bicycle Tire Penetration Resistant to AS3996-2006

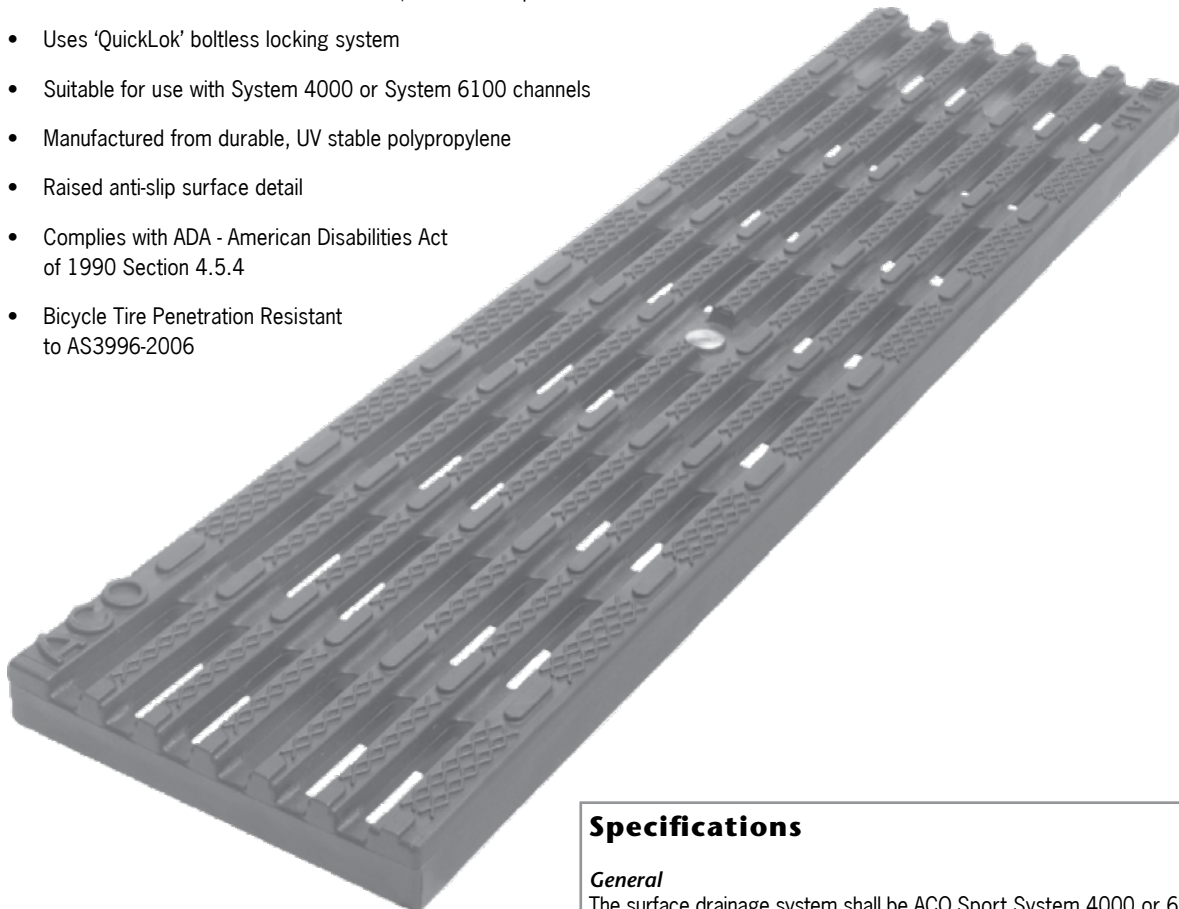

Specifications

General

The surface drainage system shall be ACO Sport System 4000 or 6100 channels* complete with ACO ADA plastic grate with 'QuickLok' locking as manufactured by ACO, Inc. or similar approved.

Materials

The covers shall be manufactured from polypropylene and have **minimum** properties as follows:

- **Independently certified to meet Load Class A to DIN 19580 - 3,500 lbs - 70 psi**
- **UV stable polypropylene**
- **Intake area of 27.4 sq. in. (176.8 cm²) per half meter of grate**

The overall width of 4.84" (123mm) and overall length of 19.69" (500mm). Slots measure 0.33" (8mm) by 1.74" (44mm).

Installation

The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.


* delete as appropriate

ACO Specification Information




ACO SPORT


ADA plastic grate details



Plan view

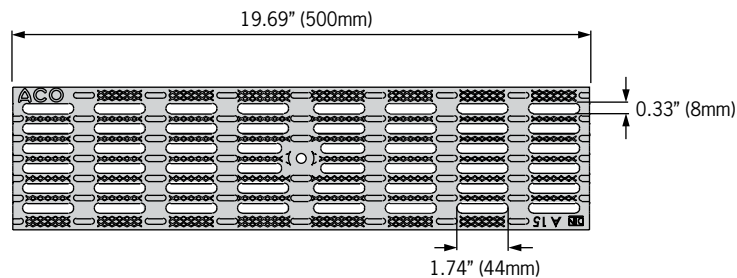


Side elevation

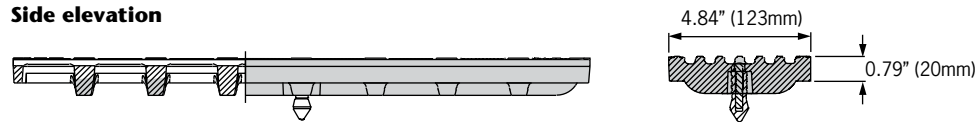

Description	Part No.	Length inches (mm)	Width inches (mm)	Weight lbs.
QuickLok grates				
ADA black plastic grate	97393	19.69 (500)	4.84 (123)	1.8
ADA gray plastic grate	97385	19.69 (500)	4.84 (123)	1.8
QuickLok locking bar	02899	-	-	0.2
QuickLok grate removal hook	01318	-	-	0.6

'QuickLok' locking mechanism

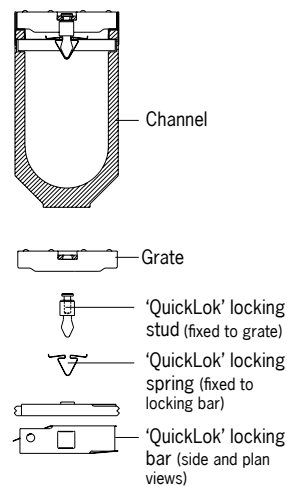

ACO 'QuickLok' is a patented boltless locking system, grates are removed and replaced with the minimum time and effort for ease of maintenance. The unique design provides a positive 'snap down' fit into the locking bar. A stud is fixed to the grate which 'locks' into the spring clip in the locking bar.

The 'QuickLok' stud is made from stainless steel and high density nylon, the locking bar and clip are stainless steel, for use in both general purpose and corrosive environments.

ACO Specification Information

ACO, Inc.

West Sales Office
 825 W Beechcraft Street
 Casa Grande, AZ 85122
 Tel: (520) 421-9988
 Toll Free: (888) 490-9552
 Fax: (520) 421-9899

Northeast Sales Office
 9470 Pinecone Drive
 Mentor, OH 44060
 Tel: (440) 639-7230
 Toll free: (800) 543-4764
 Fax: (440) 639-7235

Southeast Sales Office
 4211 Pleasant Road
 Fort Mill, SC 29708
 Toll free: (800) 543-4764
 Fax: (803) 802-1063

Follow us on



Electronic Contact:
 info@ACOSport.us
 www.ACOSport.us



© April 2018, ACO, Inc. This information is believed to be accurate but it is not guaranteed to be so. We cannot assume liability for results that buyer obtains with our product since conditions of use are beyond the control of the company. It is the customer's responsibility to evaluate suitability and safety of product for his own use. ACO, Inc. reserves the right to change the product and specifications without notice.